


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 10 TOWNSHIP 16 RANGE 3
DATE: 6-8-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 6-13-99

IN. S.P.C. E ZONE NAD '83
NAME: 16031002
N: 511413.9360(m)
E: 55370.2020(m)

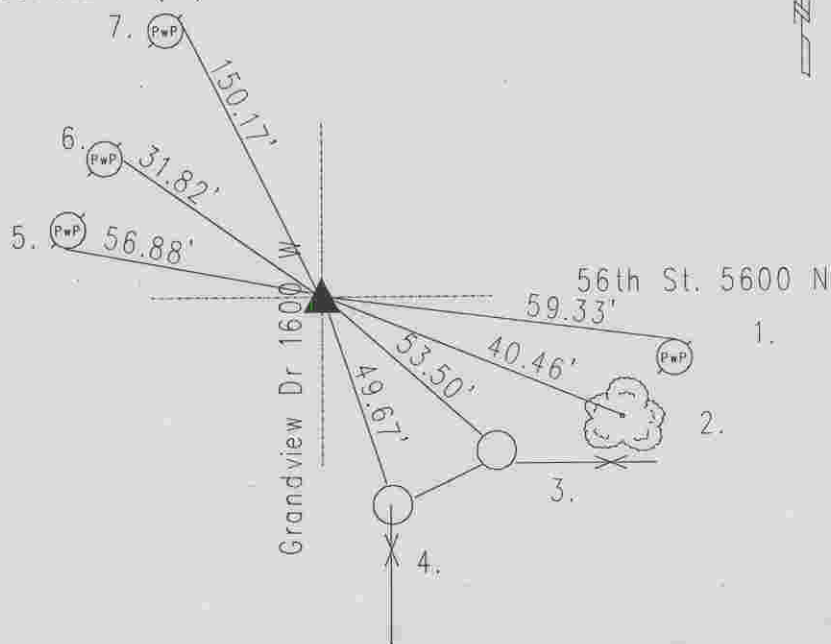

Corner originally set as post in 1820 Wm. B. Laughlin with the following witnesses: 54" poplar bearing north 85 degrees, thence east 19 links; and a 48" dogwood bearing south 45 degrees, thence west 20 links. (M.C. Atlas p. 7) A survey by Wm. P. Smith on April 7, 1869 indicates a stone by original stumps. (Washington Legal Book p.52) A survey by O.W. Voorhis on March 3, 1870 indicates a stone with the following witnesses: 10" poplar bearing north 79 degrees, thence east 8 links; and a 6" poplar bearing north 84 degrees, thence west 5 links. (Washington Legal Book p. 85) Corner referenced by Seward in 1949 and called an iron rod. Corner referenced by Schultz on 7/1/64 and called a R.R. spike set. Corner referenced by Miller on 11/17/75 and called a R.R. spike. Corner referenced by Greene on 6/11/86 and called a R.R. spike. Corner referenced by Wilcoxon on 3/14/93 and called a R.R. spike. Corner referenced by Wilcoxon on 6/13/99 and called a P.K. nail. Corner excavated by Kiste on 5/20/03 and a P.K. nail was found 2" down. No other monuments were found. A #205 cast iron Harrison Monument was set in position as the corner.

REF.	DISTANCE	DESCRIPTION
1.	59.33'	Road nail N PwP#2-333B 30"up
2.	40.46'	Mag nail w/washer in spur root 20" pine
3.	53.50'	Face of steel corner fence post
4.	49.67'	Face of steel corner fence post
5.	56.88'	Mag nail w/brass washer SW PwP#284-332 A 15"up
6.	31.82'	Road nail E PwP#194-332 A 15"up
7.	150.17'	PK nail E PwP#142-332 A 30"up